



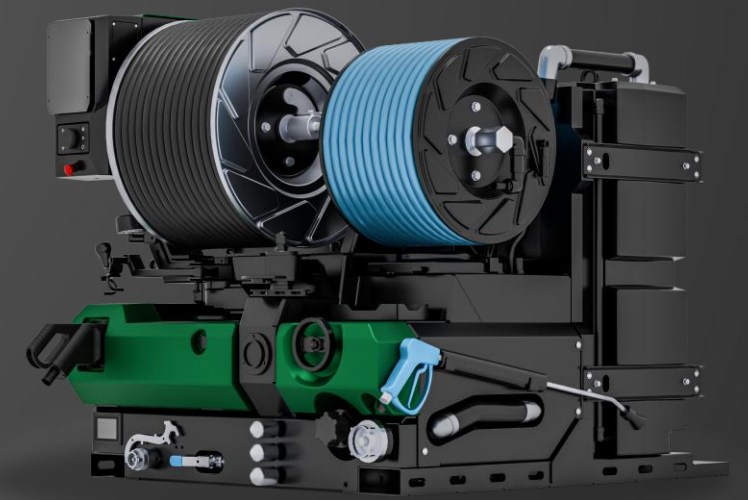

## E-JETPACK SINGLE

### ELECTRICAL SEWER JETTING SKID UNIT

#### TECHNICAL SPECIFICATIONS

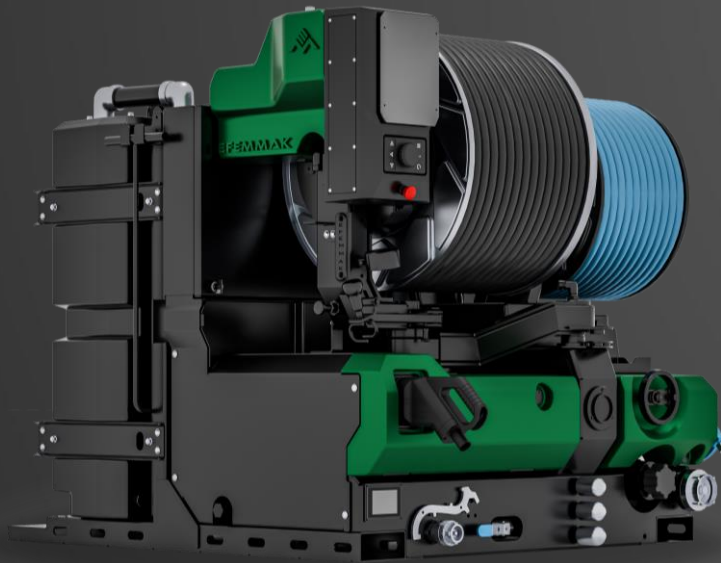

#### POWER

- | Battery; high performance 17.4 KWh Li-ion battery
- | Electric motor; powerful and efficient self cooling

#### SUPERSTRUCTURE DESIGN

- | PP water tank 300 liters
- | Electronic level indicators on E-Box display
- | Tank filling: 1 ½" hydrant connection & ¾" 50 meters hose reel

#### HIGH PRESSURE SYSTEM

- | Speck pulley driven pump
- | P45/60-250 60 lpm @ 200 bar / P45/75-180 75 lpm @ 160 bar
- | Low water warning
- | Manual pressure regulator

#### JETTING HOSE REEL SYSTEM

- | Stainless steel made
- | Electrically driven twin pivot rotating center
- | Speed regulation
- | 5/8 " 80 meter s / 1/2 " 100 meters pressure hose

#### ELECTRICAL SYSTEM

- | E-box controls – 7"

#### ACCESSORIES

- | Intersewer Arrow, Standard and Power Pull ½" nozzles
- | Washing gun

#### PAINT

- | External painted superstructure on requested RAL code and sticker applications

#### WARRANTY

- | 1-one year warranty

#### OPTIONS

- | Autec LK NEO 6 wireless control
- | Warranty extension
- | 600 liters tank
- | Fast charge
- | Hose counter
- | Battery; 34.8 KWh Li-ion battery

#### WEIGHT & DIMENSION

- | 600 kg & 1347 X 1224 X 1173 mm L x W x H

